

SEISMIC RISK & SUSTAINABLE SAFETY: STATE OF ART AND STATE OF PRACTICE

Mark Klyachko

Director, Centre on EQE & NDR (CENDR), P.O. Box # 410, St.Petersburg, 190013, Russia

E-mail: cendr@peterlink.ru

ABSTRACT:

State of art and application of aggregate risk analysis for urban safe development are a main objective of this work. Advanced approach and applied technique such as multipurpose and target disaster scenarios and maps of risk are considered as the best apparatus for risk awareness and management for sustainable safety.

Aggregate risk analysis and mapping were worked out in territorial and municipal levels and are used in such important documents as risk maps, land use cadastre, passports of investment attractiveness of territories, passports of regional and municipal safety and for controlling the process of the safe urban and industrial development. Importance and necessity of application of the scale of structural serviceability, vulnerability classification, disaster magnitude and the improved Macroseismic scale in risk analysis are underlined.

Criteria of acceptable and permissible risk are presented in developed and developing countries. Special indicators for monitoring of the sustainable safety progress have been offered.

Criteria of risk and other fields of application of the risk analysis, which are accompanied with examples implemented into practice, are also under consideration.

KEYWORDS: risk analysis, acceptability criteria and safety indicators.

1. INTRODUCTION

The objective process of growth of disasters must be met by rational counteraction being planned in advance and realized within the frames of disaster reduction policy and strategy accepted by the community. A special attention is to be paid to such objects of risk inside the human settlements as national and cultural heritage, hospitals, schools, lifelines and critical facilities. The development of urbanization and degradation of the environment accelerate the process of damage formation and growth of the disaster risk.

In this connection there appears a necessity of preliminary aggregate risk analysis (AGRA), assessment of this risk, its regard and measures directed on its regulation under the social and economic development and territorial planning.

The rational land use, investment & housing policy and urban planning cadastre require an obligatory regard of natural and man-made risks which may appear in the process of construction development of new territories and exploitation of the existing built environment.

The final goals of the work (done) are:

- a) providing the sustainable and safe development of the urban and industrial areas first of all by urban planning and engineering means;
- b) understanding of shaking, secondary and aggregate seismic risk and its preliminary and deliberate decrease up to the officially permissible level (PERIL); the following reduction up to acceptable (desirable) risk – aspiration risk level (ASPIRIL), see Fig.1, where annual numerical individual risk levels for developed countries are given in brackets;
- c) providing the protection of the territory and population against probable emergencies; preparation for the damaging and destructive earthquakes, emergencies management and elimination of disasters by own (local and territorial) forces and means.

During the more 20 years the author has managed (Klyachko 1987 – 2006) to develop, and implement the system of special approaches, criteria, methods and decisions, which became a necessary and sufficient tool-box for analysis and control of the risk, the system being used at present.

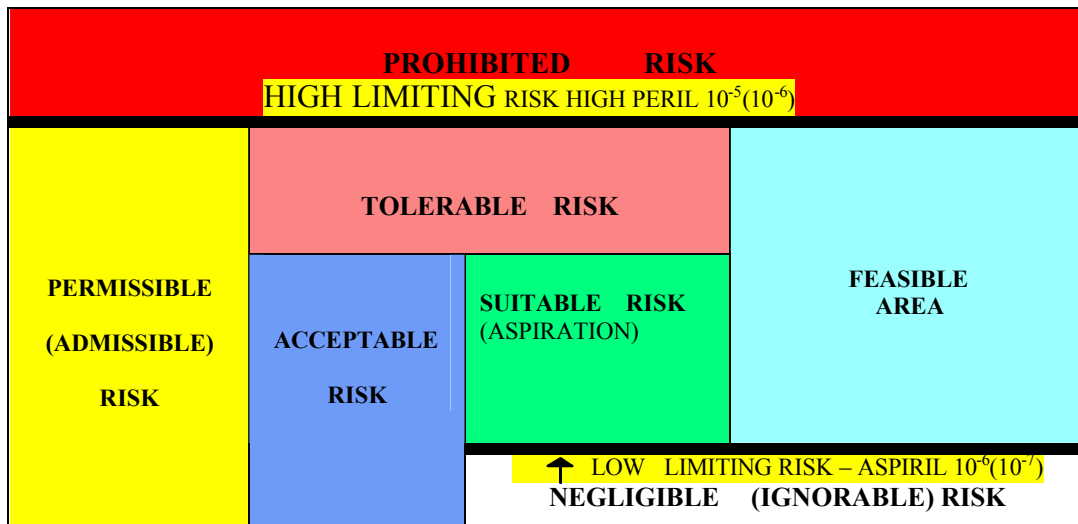


Figure 1. Scheme of Aggregate Urban Risk Allocation (AURA).

2. ON NECESSITY OF REGARDING THE RISKS IN THE URBAN PLANNING AND REGIONAL DEVELOPMENT

The knowledge of natural and man-made risks, i.e. the probability of human losses and property damage, is absolutely necessary when estimating the current state of the “life quality”. This knowledge is also necessary on all stages of progress of the “sustainable safety” of society that is one of the basic elements of “the stable development”.

The initial assessments of the natural and man-made risk are defined by construction and planning vulnerability of the built environment in existence and by probability of occurring of one or another dangerous natural and technogenic impacts. These initial values which are, as a rule, inadmissible for normal living of a human being and for keeping his environment are to be steadily and consequently decreased (up) to some PERIL ordered by code and adopted by community in accordance with the real economic capacity, i.e. it is necessary to manage the risks that can be realized under the long-term social and economic development and territorial planning.

As the basic instruments, which are necessary for the functioning of the most spread mechanisms of managing the risk, the following can be named:

- a) the maps of individual natural and industrial risk;
- b) probable disaster scenarios (DISC) with indication of human losses and property damage and associated disaster with the assessment of economic stability of the territory to withstand disasters of the size being expected ; one or few working DISC, which has to be taken into consideration, are especially picked out;
- c) passports of safety of territories and cities (settlements);
- d) regarding the AGRA in the land and urban planning cadastres;
- e) development of insurance and reinsurance of AGRA;
- f) passports of investment attractiveness of the territory allotted for various purposes and kinds of built environment.

3. THE MAIN APPROACHES, METHODS AND ASSUMPTIONS UNDER THE RISK-ANALYSIS

As was accepted in (Klyachko, M.,1987), since 1987 any urban area is considered as a social and economic system of urbanization (SESURB), which consists of “k” objects of risk having a definite social and economic value “w” and characterized by block matrices of social V_{ijk} and constructive V_{zjk} vulnerability (vulnerability of built environment and population). SESURB is exposed to “i” natural and secondary man-made hazards (threats) described by matrix H_i and realized by the concrete damage formation factors “j” with blocked into the matrix U_j (usually “i” is larger than “j”).

For the engineering calculations the destabilizing (damage formation) loads and impacts on the SESURB which are represented by matrix A_j are used. The state of SESURB (social and economic filling, value, vulnerability) can change at any time “t” and in any season “s” that is corrected by the time operator T_{st} .

The general expression - a matrix formula of risk-analysis (FORA) which defines deterministically the probable economic losses (social losses) in the SESURB under the destabilizing impacts being described by the matrix H_i - has the form:

$$D = A_j \cdot W_k \cdot V_{jk} \cdot T_{st} \quad (1)$$

$$A_j = H_i \cdot U_j \cdot I_{ik} \quad (2)$$

Developed Method of Logistic Estimation and System Analysis (MELESA) are necessary on each stage to complete the FORA (starting from the database – Applied Materials for Risk Analysis - AMFORA) and to solve the problem. MELESA is based on the combination of:

- Theory of Fuzzy Sets or “Eroded Images”;
- Reasonable Sufficiency;
- Economic Expediency;
- Optimized Choice;
- Risk Smoothing and Leveling (human losses minimizing)
or Weak Points Protecting (property damage reduction)

AMFORA consists of 2 parts:

- a) The information and analytical database (DIABAS) including characteristics and peculiarities of the object of risk. This database is the main dependable (linked to the object of risk) and specific component of the initial part of AMFORA.
- b) The bank of knowledge and technical experience of the Earthquake (BANKNOTE) which were received on other territories (objects) and/or in other conditions. BANKNOTE is an independent (not linked to the object of risk), conditionally abstract, permanently developing initial material with which the incomplete information and analytic database (DIABAS) can be added for the further elaboration of DISC, i.e. for the assignment of impact, assessment of vulnerability and for modeling the damage formation on the basis of similarity and analogies by the expert way.

The standard and main part of AMFORA is formed on the basis of studying of the so-called base objects for the analysis of the buildings (BAOBAB).

When performing AGRA on one or another territory the following conditions and procedures are used:

1. Risk-analysis may be subdivided into four levels with corresponding maps of risk: national level (M 1:1000000), territorial level (M 1:200000), city (municipal) level (M 1:10000), and object level (M 1:500 – 1:2000).
2. When performing the risk-analysis on the territorial level, the general population density on the territory being considered, mainly in the night time, as well as the schemes of the built environment of the territory differentiated by the construction types and number of stories, level of EQ resistance and/or class of vulnerability with the use of macroseismic scales are used (MSK or MM scales are admissible).
3. Under the risk-analysis on the municipal level and when the work is performed on the topographic maps on the scale of 1:10000, the more accurate data on location of population in the buildings differentiated by the class of their vulnerability (according to EMS or IMSK scale) are used. In doing so, it is desirable to take into account different vulnerability of population to seismic impacts (adults, children, aged, disabled, etc.) with regard of their psychophysical response and readiness to emergencies. The built environment is to be considered not by the “spots”, but in detail with examination of every building according to the data of inventory and certification, passports of reliability and safety and territorial catalogues of vulnerability of the built environment represented mostly by BAOBAB. On the city level the complete set of the probable DISC (DISC «MARIA» according to Klyachko) which includes the night (3 am), day (3 pm) and “transport” (7-8 am or pm) is to be drawn up (the secondary risks are taken into account).
4. The seismic impact is allowed to be assigned with the help of intensity of expected EQ with the use of maps of seismic zonation with different detailed elaboration (general, detailed and microzonation). The seismic impact on the key objects of life support and management of the emergencies as well as on the large potentially risk-prone technological objects (PORTOs) is advised to assign with the use of the recommendations (CENDR,

1996). In scenarios of probable seismic events the well-known historical EQ (scenarios-analogues) and designed (virtual) scenario events can be used. Under the detail risk-analysis it is recommended to use the specially elaborated scenarios of seismic events in which the information on for-shocks and after-shocks, the duration of impact, its spectral analysis, presence and characteristics of the vertical component is contained in accordance with (Klyachko, 2004).

5. The calculation of the complex individual risk on the territorial level is realized by the maximum value, i.e. an envelope of risks, the values of which with a high probability (90%, 95% and/or 98%) will not be exceeded. The risks of losses & damages caused under secondary disasters are summed up.

6. To estimate the parameters of probable disaster we have to apply the scale of disaster magnitudes – DIMAK (Klyachko, 1994). For each DISK the disaster magnitude – M_d , index of relative vulnerability – p , economic stability parameter – d_m and other characteristics of disaster can be easily calculated.

7. To manage the process of risk reduction and to provide for effectiveness of preventive measures we use a special control disaster scenario “DISKONT” ((Klyachko, 2004) and procedure represented in Fig.2.

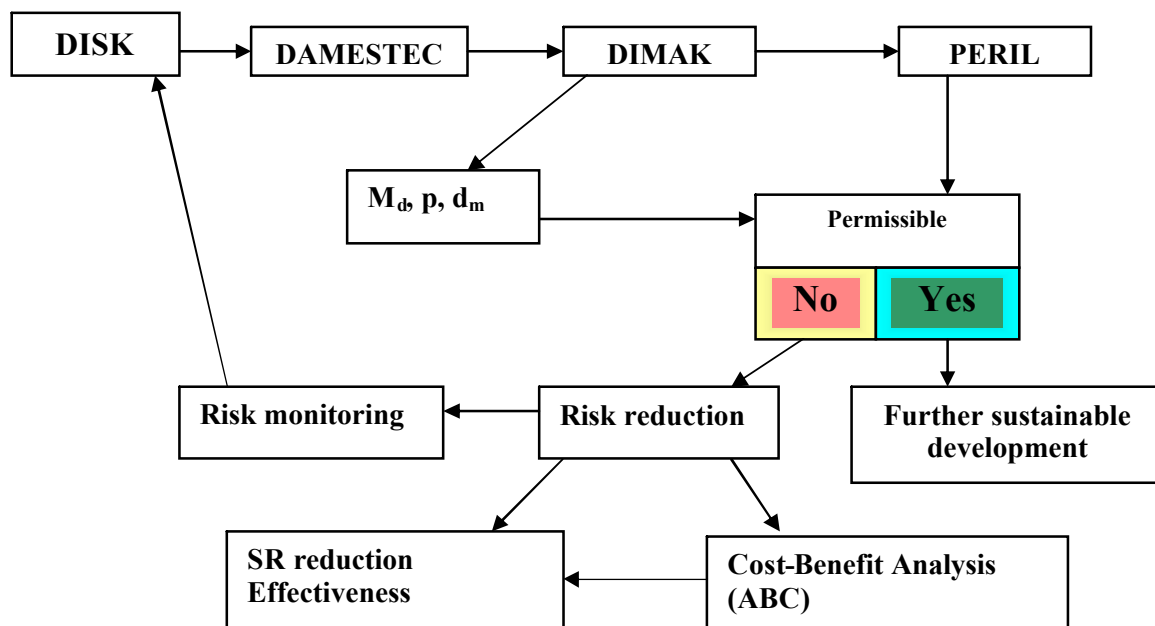


Figure 2. Scheme of risk monitoring and control

4. ESTIMATION OF CONSEQUENCES AND RISKS OF THE SECONDARY INDUSTRIAL DANGERS

The procedure of estimation of additional risk introduced by secondary disasters and, in particular, by industrial striking factors (fire, explosion, and chemical impact of PORTOs) is to be made in several stages. At the first stage the list of PORTOs with regard of the accepted scale of risk-analysis is made:

- on the territorial level – PORTOs of the 1st, 2nd and third class the destruction of which may result in national, regional or territorial emergencies;
- on the city (municipal) level of the risk-analysis the PORTOs of the 4th and 5th class the damages of which may result in local emergencies, are to be taken into account.

At the next stages for the EQs of different intensity the probability of the fact that the dangerous objects can receive the level of damage that can exceed the threshold value (serviceability limit state # 2) is estimated. Then the fields of striking factors (excessive pressure in the case of explosion, temperature of fire, and concentration of chemically hazardous matters) with regard of wind rose, temperature and air pressure, landscape, etc. are constructed; the social losses and the individual risk are calculated. The criteria and probabilities of emergency situation on the PORTOs are assessed for each selected PORTOs on the base of BANCNOTE, which was

created using the processing of the data on consequences of well-known EQs of the last and current century (UNDP, RMS, WSSI, Munich Re, etc). Structure of GIS and methodology of assessment of secondary industrial risk are worked out in the Extreme Situation Research Centre, Russia.

5. CRITERIA OF RISK AND INDICATORS OF STABLE SAFETY.

For estimation of the safety of population and territory and for monitoring and control of safe development it is necessary to have the criteria of safety and indicators of safe development. The criteria of safety can be assigned within an expedient range. In this case both PERIL and the permissible parameters of the probable disaster are recommended to be broadly applied and implemented into practice.

The main control indicators of safe development are listed below:

1 Individual aggregate (complex = natural and man-made) risk;

2 Magnitude of probable design disaster – M_d ;

3 Relative social vulnerability of population (p) under probable working disaster taken into consideration;

4 Relative index which depends on economic stability of the territory – d_m .

Parameters # 2, # 3, # 4 are calculated in accordance with the scale of disaster magnitude (Klyachko, 1994).

As the unconditional priority when developing the policy and realizing the strategy of safe development of disaster is the improvement of life quality through the increase of safety of population, the main criteria of risk and the main component of PERIL are criteria # 1 and # 3. Permissible (limit) parameters are assigned for each socio-economic community by means of Acts of safety and building codes, depending on economic capacity, democracy etc. Table 1 shows the criteria and parameters, which are suggested for both the actual estimations and for monitoring and control of safety on the urbanized and economic areas.

Table 1. Parameters for estimation and control of the territorial safety

№	Criterion		Acceptability	Permissibility
1	2		3	4
1	obligatory	Individual risk	10^{-7} (10^{-6})	10^{-6} (10^{-5})
2		Magnitude of disaster- M_d	$\leq 3.0-3.5$	$\leq 3.5 - 4.5$
3		Relative social vulnerability- p	≤ 0.25	$\leq 0.25-0.5$; ($0.5-0.75$)
4	additional	Index of economic stability of the territory to the disaster- d_m	Territorial $d_m \leq 5$	Territorial $d_m \leq 5-10$
5	desirable	Insurance of dwelling	Total (health, dwelling, property, entrepreneurship, business)	Partial compensation

* Limit parameters indicated in brackets are recommended for developing countries

In the process of social and economic development the monitoring and control of safety is realized in accordance with fig.2. In doing so we use DISC “DISCONT” (see item 7, division 3).

6. EXAMPLES OF SEISMIC RISK CONTROL IN THE SAFE DEVELOPMENT

Real safe development of various urban areas was studied, that is presented below.

6.1. Avacha Bay Area, Kamchatka.

The complex of measures on decreasing the seismic risk and mitigation of the disaster being expected has been developed and realized on the urbanized territory around the Avacha Bay on the south-east of Kamchatka peninsular since 1987 because of the forecast of a destructive EQ which may happen in the near future. The effect of decrease of probable seismic disaster by preventive strengthening of buildings with insufficient seismic stability in Petropavlovsk-Kamchatski is shown in table 2 where the consequences of the EQ being expected are estimated by one working DISC (chosen from 6 scenarios of the seismic event). To estimate required disaster parameters the DIMAC scale was used. Target (desirable) indicators are: # 2 – $M_d < 4$; # 3 – $p < 0.5$

EQ prognosis is forecasting the destructive seismic event near Petropavlovsk-Kamchatski during nearest 1 - 2 years. Seismologists appealed that EQ may happen tomorrow, and the main objective became human protection realized very quickly. This prognosis was repeated again and again during last 20 years. That is why in this example the management of risk was realized only for increasing the seismic safety of the territory and population but the policy and strategy of mitigation of the probable disaster was not connected with the prospective social and economic development of the city and the region.

Here indicator # 1 – individual shaking risk is extremely high because the destructive event probability determines probable tragic consequences on this unprepared urban area. In this example not only indicator # 2 remains behind the values required, but indicator # 3 is difficult to manage Indicator # 4 shows how difficult for this region being granted to cope with the disaster by own forces and means.

Table 2. Managing the seismic risk when strengthening the buildings on Kamchatka

Stage of managing risk		Consequences of the EQ				Estimation of disasters by the DIMAK scale		
		Killed K	Injured I	Homeless H	Econom. losses (\$, mln)	M_d	Term of disaster	Score of disaster permissibility
Before strengthening, 1990		3 000	14 000	100 000	8 000	5.63	Major disaster of national scale	Unacceptable
By 2000		2 000	6 000	65 000	4 200	5.29	Major disaster of national scale	Unacceptable
Target results	by 2010	200	1 500	9 000	1 200	4.29	Disaster of territorial scale	Semi acceptable
	by 2020	50	200	5 00	1 000	3.95	Disaster of local scale	Permissible

6.2. Krasnodar region

On the territory of intensively developing Krasnodar region (the largest urban area of the Russia's Black Sea region), in 2004-2005, CENDR together with Extreme Situation Research Centre carried out the mapping of complex seismic risk on the territorial level (M 1:200 000) with the purpose of social and economic development and territorial planning.

Target (desirable) PERIL was assigned equal to 10^{-5} per year (as a first stage). Risk-analysis showed that the risk of damage on PORTOs (highly fire and explosive, and chemically hazardous objects) results in increase of indicator # 1 for some cities by 10-40%. Beside the calculations of the risk, 5 disaster scenarios (DISC) were elaborated on the basis of working (virtual) scenarios of seismic events, and 17 scenarios of disasters on the basis of historical (analog) seismic events were studied. According to the worst DISC, deaths are estimated as $K = 4700$ and the injured as $I = 13500$. But the probability of such seismic event is very low and, hence, indicator # 3 is beyond any significance when monitoring and control the safe development for a period of 50

years. Special attention should be given to indicator # 1 that can be explained by creation of a new map of general seismic zonation of Russia. Estimations of seismic hazard for the settlements under consideration increased greatly and the built environment in existence was planned without required EQ-resistance. Table 3 shows the estimations of individual seismic risk for above – mentioned area.

Table 3. Estimations of the individual seismic risk without and with regard of secondary industrial dangers

Name of settlement	Population, thousands	Seismic risk x 10 ⁻⁵ / year	
		With regard of direct losses	With regard of damages on PORTOs
Anapa District	136.35	26.39	28.04
Armavir	181.89	1.27	2.43
Gelendgyk	85.01	24.89	26.08
Krasnodar	879.43	5.30	7.60
Novorossiysk	251.64	23.28	31.25
Sochi	596.1	27.08	29.75

6.3. Anapa – city & children resort, Black Sea coast

To support a new urban planning documentation for the town of Anapa the initial stage of the complex risk analysis on the municipal level was carried out. The analysis showed that the estimation of individual complex risk for Anapa exceeds 28×10^{-5} /year and in some settlements even 37×10^{-5} /year that is absolutely inadmissible and requires an obligatory regulation (decrease by 50-100) in case of territorial development. The following target values of indicator # 1 are recommended:

- 10^{-5} /year for all settlements till 2015 year;
- 10^{-6} /year for all settlements till 2030 year.

It is necessary to note that if the EQ-hazard has been taken into consideration since 2001 in construction designing on the Black Sea coast near Anapa, there are no estimations and no tsunami-risk map until now. This secondary disastrous factor can significantly worsen the economic losses in case of the EQ – disaster and, thus, worsen the values of indicator # 2, but in this work tsunami is not under consideration.

7. CONCLUSIONS

1. The developed and approved by 1995 complex apparatus for seismic risk-analysis on the urban and industrial areas is a necessary and sufficient tool-box for understanding the aggregate risk and its further systematic decrease within the frames of the sustainable development.
2. The proposed indicators of safe development describe the state of safety on one or another urban or industrial area full enough and allow to plan and manage the risk in short- and long-term aspect with the use of special procedure of controlling the risk in a virtual form and in real time.
3. The practical works being carried out present a very important strategic stage for the further understanding, perception and obligatory regard of the risk under the space-time planning of the territories being considered and for the current policy of rational land use and investment into construction on the one hand and for decrease of the complex seismic risk up to PERIL on the other hand.

REFERENCES

Klyachko, M.(1987). *Methodical manual for certification building in seismo-prone areas*, CENDR, Petropavlovsk, Kamchatka (English version 1988)

- Klyachko, M.(1993a). *Developing expert methods for analysis and prognosis of reliability & safety of urban and structural systems*. EQE # 5, Moscow (in Russian)
- Klyachko, M., Uzdin, A., Minchenko, O. and Dolgaya, A.(1993). *Regard of Soil Condition when Estimating the Seismic Stability of Residential Housing*, Proceeding of 8th Int.Seminar on EQ Prognostics, p.8, Tehran, I.R.Iran, Sept.27-29.
- Klyachko, M.(1994). *The Scale for Disaster Magnitude Measurement as Applied to Earthquakes*. Proc.of 9th Int.Seminar on EQ Prognostics, San Jose, Costa Rica, Sept.
- Klyachko, M.(1995). *The development of GIS, EQ-DISC and DIMAK as the best tools for seismic risk analysis on the urban areas*. 5th Int.Conf. on Seismic Zonation, Oct.17-19, Nice, Quest Editions, v.1, p.158-165.
- Klyachko, M. and Kouznetsova–Izrahmetova I.(1996a). *Estimation and abatement of the urban seismic ris.*, Proc. of Eleventh World Conf. on EQE, Acapulco, Mexico, June 23-28.
- Klyachko, M.(1996b). *Urban Disaster Vulnerability Assessment and Lessening is a Key for Save Developmen.*, Natural Disaster Reduction, Proc.of Conf. (Ed. By George W.Houner and Riley M.Chunf), ASCE, pp.11-12.
- Klyachko, M.(2000). *An Integrated Apparatus for Seismic Risk Control*. 6th Int. Conf. on Seismic Zonation, Palm-Springs.
- Klyachko, M.(2002a). *Estimating and Reducing Vulnerabilities of Urban Housing Construction in Russia*. Proc. of 7NCEE, Boston, USA
- Klyachko, M.(2002b). *Risk Acceptability Conception and Seismic Code of New Generation..* 12 ECEE, London.
- Klyachko, M.(2004). *Urban Disaster Scenarios Guidelines and Application for Risk Managemen..* 13WCEE, Vancouver.
- Klyachko, M., Larionov, V., Sutshev, S., et.al. (2005). *Risk Mapping and Disaster Scenarios Development For Urban Seismo-Prone Areas of Russia*. Proc. of 250th Anniversary of the 1755 Lisbon Earthquake, Lisbon
- Klyachko, M.(2006). *Disaster scenarios and risk mapping for sustainable safety*. 8NCEE, S.F., USA
- Larionov, V.I., Frolova, N.I. and Suchshev, S.P. (2000). *Seismic and Complex Risk Assessment and Management for the Kamchatka Region*. Proc. of the XII World Conference on Earthquake Engineering - Auckland, New Zealand, paper # 2412.
- Larionov, V.I., Nikolaev, A.V., Frolova, N.I., Sushchev, S.P. and Ugarov, A.N. (2001). *Advanced procedures for risk assessment and management in Russia*. Risk Assessment and Management, Nos. 3-4. – V. 2. - P. 303-318.
- Uzdin, A., et. al.(1996). *Recommendation for assigning seismic impact on the buildings and structures of different responsibility (under supervision of M. Klyachko)*. CENDR, MoC, (in Russian)